


ORDERING GUIDE

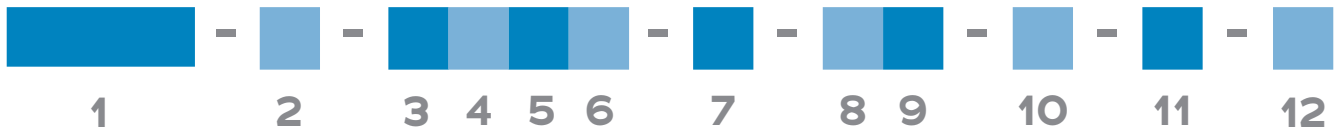

1 Series	LMDP Latching Metal Micro-D Pin LMDP - Latch Side (STD)	LMDS Latching Metal Micro-D Socket LMDS - Latch Receptacle side (STD)
2 Number of Contacts	009 015 021 025 031 037 051 *	
3 Termination Type	WD Discrete Leadwire	
4 Wire AWG	4 24 AWG 6 26 AWG (STD)	8 28 AWG 0 30 AWG
5 Wire Type	Q Nema HP3 (STD) R M22759/11	S M22759/33 X Other
6 Wire Length (inches)	18.0 18.00 (STD)	XX.X Custom length
7 Color Scheme	1 10 Repeating 2 Blue 3 White	4 Non Repeating 5 Yellow
8 Shell Material & Finish	N Aluminum Shell, Electroless Nickel Plated B Aluminium Shell, Black Anodized	CD Aluminium Shell, Cadmium Plated P Stainless Steel Shell, Passivated
9 Common Options	PA Panel Mount Rear, O-Ring IBS Integrated Backshell HT High Temp Epoxy	PB Panel Mount, Rear BSY Custom Backshell RH RoHS Compliant
10 Shield / Jacket	D Slip On Metal Braid E Machine Braid F Flexo Braid	J Nomex Braid ST Shrink Tube
11 Mod Code	M10 Keyed M30 Ground Spring	M50 Space Grade Micro-D, SPT1 M53 Space Grade Micro-D, SPT2
12 Special Instructions	YYY Describe anything that is not covered in standard options	