











Micro-D

Latching Micro-D

▀ Latching Micro-D Horizontal Surface Mount (TYPE H0)


Series	# of Contacts	Shell Material and Finish / Hardware	Termination Type	Options
LMD S-socket 	009	 N (STD) Aluminum Shell, Electroless Nickel Plated  C Aluminum Shell, Cadmium Plated  B Aluminum Shell, Black Anodized  P Stainless Steel Shell, Passivated	H0 - Horizontal Surface Mount 	HT High Temp. Epoxy (200 °C)  RH RoHS COMPLIANT  PA Panel Mount, Rear, O-Ring  PB Panel Mount, Rear 
	015			
	021			
	025			
	031			
	037			
512				

(Two Row 051)


Options:
001-051

51- Latch Receptacle

Example

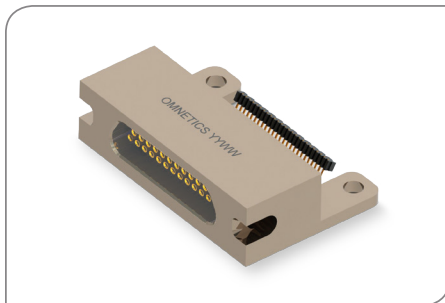

LMD S-025-N51-H0-RH

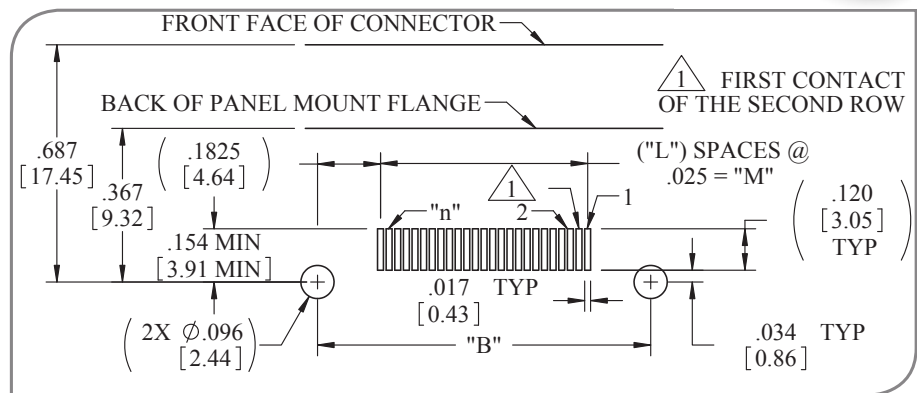

▀ Contacts

▀ English (IN)

▀ Metric (mm)

"n"	Rows	"B"	"L"	"M"	"B"	"L"	"M"
9	2	.565	8	.200	14.35	8	5.08
15	2	.715	14	.350	18.16	14	8.89
21	2	.865	20	.500	21.97	20	12.70
25	2	.965	24	.600	24.51	24	15.24
31	2	1.115	30	.750	28.32	30	19.05
37	2	1.265	36	.900	32.13	36	22.86
51	2	1.615	50	1.250	41.02	50	31.75