


ORDERING GUIDE

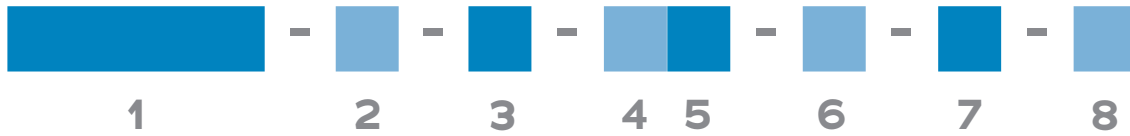

1 Series	MMDP Metal Micro-D Pin	MMDS Metal Micro-D Socket
2 Number of Contacts	009 015 021 025 031	037 051 *
3 Termination Type	FF Flex Tail	
4 Shell Material & Finish	N Aluminum Shell, Electroless Nickel Plated B Aluminium Shell, Black Anodized	CD Aluminium Shell, Cadmium Plated P Stainless Steel Shell, Passivated
5 Hardware	00 None, Ø .092 Hole 02 Jackscrews, STD Length, Hex (MMDP - STD) 04 Jackscrews, Long Length, Hex 06 Float Mount, Front Mounted	01 Fixed Jack-posts (MMDS - STD) 03 Jackscrews, STD Length, Slotted 05 Jackscrews, Long Length, Slotted YY Non Standard Hardware
6 Common Options	PA Panel Mount Rear, O-Ring HT High Temp Epoxy	PB Panel Mount, Rear RH RoHS Compliant
7 Mod Codes	M10 Keyed M50 Space Grade Micro-D, SPT1	M30 Ground Spring M53 Space Grade Micro-D, SPT2
8 Special Instructions	YYY Describe anything that is not covered in standard options	