


## ORDERING GUIDE

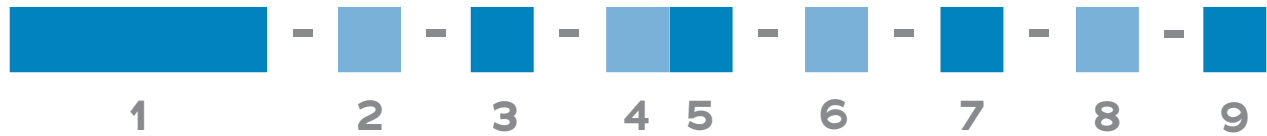

<b>1 Series</b>	<b>MMDP</b> Metal Micro-D Pin	<b>MMDS</b> Metal Micro-D Socket
<b>2 Number of Contacts</b>	<b>009</b> <b>015</b> <b>021</b> <b>025</b> <b>031</b>	<b>037</b> <b>051*</b>
<b>3 Termination Type</b>	<b>SR1</b> Narrow Right Angle .100	
<b>4 Shell Material &amp; Finish</b>	<b>N</b> Aluminum Shell, Electroless Nickel Plated <b>B</b> Aluminium Shell, Black Anodized	<b>CD</b> Aluminium Shell, Cadmium Plated <b>P</b> Stainless Steel Shell, Passivated
<b>5 Hardware</b>	<b>OO</b> None, Ø .092 Hole	<b>O1</b> Fixed Jack-posts (STD)
<b>6 Common Options</b>	<b>ETH</b> End Threaded Holes (#2-56 UNC-2B) <b>HT</b> High Temp Epoxy	<b>M</b> Plain Mounting Holes <b>RH</b> RoHS Compliant
<b>7 Mod Codes</b>	<b>M10</b> Keyed <b>M50</b> Space Grade Micro-D, SPT1	<b>M30</b> Ground Spring <b>M53</b> Space Grade Micro-D, SPT2
<b>8 Tail Length</b>	<b>109</b> <b>140</b> <b>172</b>	
<b>9 Special Instructions</b>	<b>YYY</b> Describe anything that is not covered in standard options	