


ORDERING GUIDE

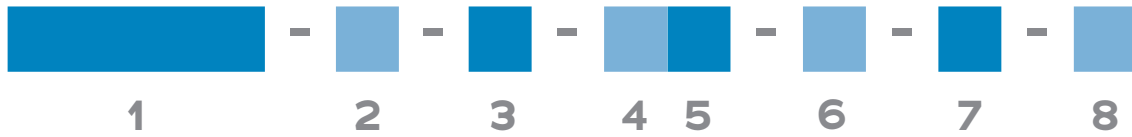

1 Series	MMDS Metal Micro-D Socket
2 Number of Contacts	009 015 021 025 031 037 051* 069 100 <small>* Use 512 for Two Rows 051 and 513 for Three Rows 051</small>
3 Termination Type	H2 Right Angle Thru-Hole
4 Shell Material & Finish	N Aluminum Shell, Electroless Nickel Plated CD Aluminium Shell, Cadmium Plated B Aluminium Shell, Black Anodized P Stainless Steel Shell, Passivated
5 Hardware	OO None, Ø .092 Hole O1 Fixed Jack-posts (MMDS - STD) OO2 Jackscrews, STD Length, Hex (MMDP - STD) O3 Jackscrews, STD Length, Slotted O4 Jackscrews, Long Length, Hex O5 Jackscrews, Long Length, Slotted YY Non Standard Hardware
6 Common Options	PA Panel Mount Rear, O-Ring PB Panel Mount, Rear HT High Temp Epoxy RH RoHS Compliant
7 Mod Codes	M10 Keyed M30 Ground Spring M50 Space Grade Micro-D, SPT1 M53 Space Grade Micro-D, SPT2
8 Special Instructions	YYY Describe anything that is not covered in standard options