


ORDERING GUIDE

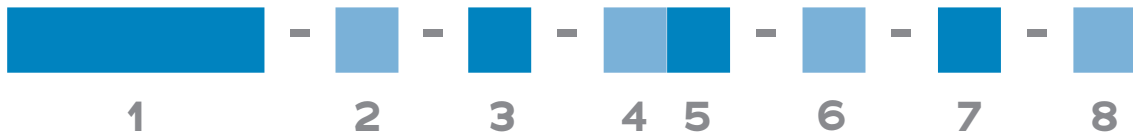

| | | |
|--------------------------------------|--|--|
| 1 Series | MMDP Metal Micro-D Pin | MMDS Metal Micro-D Socket |
| 2 Number of Contacts | 009 015 021 025 031 037 051 [*] 069 100 | |
| | [*] Use 512 for Two Rows 051 and 513 for Three Rows 051 | |
| 3 Termination Type | SS Soldercup | |
| 4 Shell Material & Finish | N Aluminum Shell, Electroless Nickel Plated B Aluminium Shell, Black Anodized | CD Aluminium Shell, Cadmium Plated P Stainless Steel Shell, Passivated |
| 5 Hardware | 00 None, Ø .092 Hole 02 Jackscrews, STD Length, Hex (MMDP - STD) 04 Jackscrews, Long Length, Hex 06 Float Mount, Front Mounted 08 Non-Removable | 01 Fixed Jack-posts (MMDS - STD) 03 Jackscrews, STD Length, Slotted 05 Jackscrews, Long Length, Slotted 07 Float Mount, Rear Mounted YY Non Standard Hardware |
| 6 Common Options | PA Panel Mount Rear, O-Ring BS1 45 Degree Round Entry, Micro-D Backshell BS2 Straight Oval Entry, Micro-D Backshell BS3 90 Degree Oval Entry, Micro-D Backshell BS4 45 Degree Elliptical Entry, Micro-D Backshell BS5 Straight Elliptical Entry, Split Micro-D Backshell BS6 45 Degree Round Entry, Split Micro-D Backshell | PB Panel Mount, Rear BSY Custom Backshell HT High Temp Epoxy RH RoHS Compliant |
| 7 Mod Codes | M10 Keyed M50 Space Grade Micro-D, SPT1 | M30 Ground Spring M53 Space Grade Micro-D, SPT2 |
| 8 Special Instructions | YYY Describe anything that is not covered in standard options | |