


ORDERING GUIDE

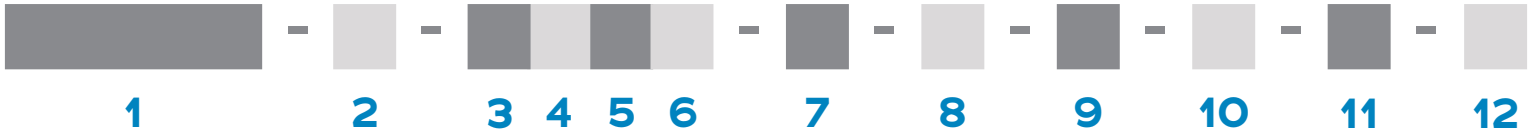

1 Series	MNPO Metal Nano Pin Offset	MNSO Metal Nano Socket Offset
2 Number Of Contacts	09 15 21 25 31 37 51 65 69 85 91	
3 Termination Type	WD Discrete Wires	WC Cable
4 Wire Gage	0 30 AWG (STD)	2 32 AWG
5 Wire Type	Q NEMA HP3 (formerly M16878/4 and /6)	XX.X M22759/33 (30 AWG only)
6 Wire Length	18.0 18.00" (STD)	XX.X Custom Length
7 Color Scheme	C 10 Repeating Colors Per MIL STD 681	Y All Other Wire Color
8 Shell Material & Finish	N Aluminum Shell, Electroless Nickel Plated B Aluminium Shell, Black Anodized T Titanium Shell, Unplated	CD Aluminium shell, Cadmium Plated S Stainless steel Shell, Passivated
9 Common Options	ETH End Threaded Hole, #0-80 YY Non Standard Hardware (threaded holes, thumb screws, #2-56 screw) HT High Temp. Epoxy BS1 Standard Straight Backshell BS3 90/RA Oval BSY Custom Backshell	EJS End Jack Screw RH RoHS Compliant BS2 45 Oval BS4 2 Piece BS CS Customer Supplied Material
10 Shield / Jacket	D Slip-on Braid	E Machine Braid F Flexo Braid J Nomex Braid ST Shrink Tube
11 Mod Codes	M10 Custom Keying M53 Space Grade Nano-D, SPT2	M50 Space Grade Nano-D, SPT1
12 Special Instructions	YYY Describe anything that is not covered in standard options	