


# SINGLE ROW MICRO-D STRAIGHT THRU-HOLE (TYPE DD)

Omnetics' **Single Row Micro-D Straight Tail connectors** provide a trim and streamlined interconnect for rugged, low-profile system designs. This precision connector enables designers to create high-reliability products for the military, aerospace, oil and gas, and medical industries. Omnetics' Flex Pin design absorbs shock and vibration, enabling small devices to endure the rigors of the field without loss of integrity. Our trim, rugged connectors meet or exceed the demanding requirements of MIL-DTL-83513. They can endure more than 2,000 mating cycles in operating conditions that include temperate extremes ranging from -55° to 200°C. Available in a range of shell, plating, and pin options to meet an extensive range of systems.

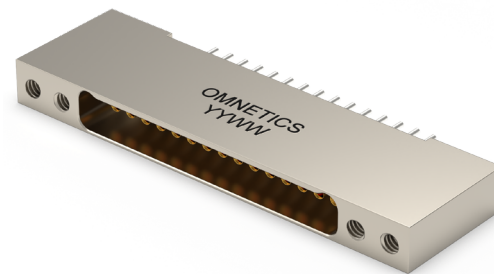

## Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125°C (200 °C w/HTE)
Current rating	3 Amps per contact per MIL-DTL-83513
Voltage Rating (DWV)	600 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 500 VDC
Shock	50 g's with no discontinuities > 1 microsecond
Vibration	20 g's with no discontinuities > 1 microsecond
Thermal Vacuum Outgassing	1.0% max TML, 0.03% max CVCM - NASA SP-R-0022
Contact Resistance	26 milliohms (65 mV) max @ 2.5 Amps per MIL-DTL-83513
Mating/Unmating Force	3 oz. (.85g) typical per contact






## Material Specifications

TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-83513
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	Thermoplastic per MIL-M-24519
Interfacial Seal	Silicone Elastomer per A-A-59588
Hardware	Stainless Steel, 300 Series, Passivated per SAE AMS-2700

## Shell Options

MATERIAL	FINISH
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700

# SINGLE ROW MICRO-D STRAIGHT THRU-HOLE (TYPE DD)

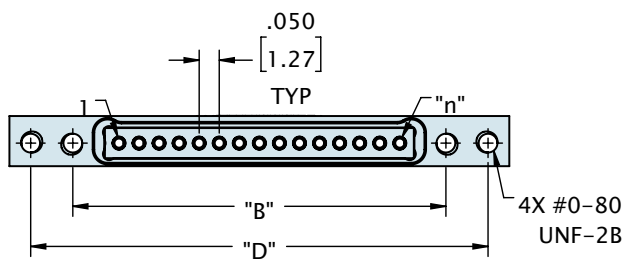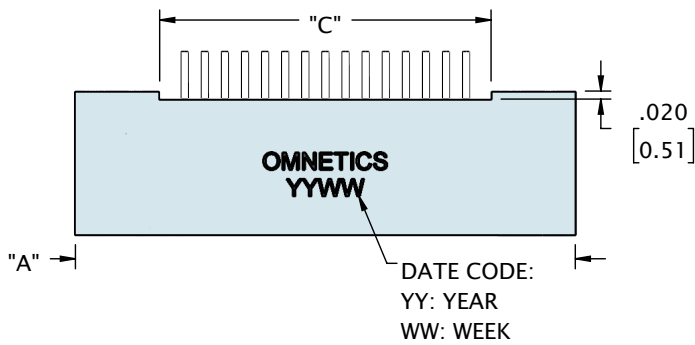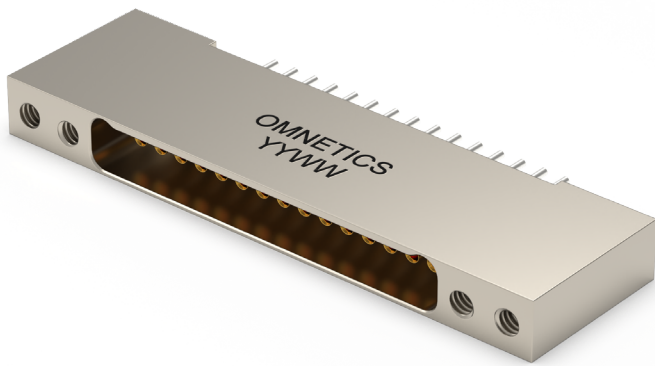


CONTACTS	ROWS	"A"	"B"	"C"	"D"
4	1	.696 [17.68]	.380 [9.65]	.276 [7.01]	.590 [14.99]
9	1	.946 [24.03]	.630 [16.00]	.526 [13.36]	.840 [21.34]
15	1	1.246 [31.65]	.930 [23.62]	.826 [20.98]	1.140 [28.96]
21	1	1.546 [39.27]	1.230 [31.24]	1.126 [28.60]	1.440 [36.58]
25	1	1.746 [44.35]	1.430 [36.32]	1.326 [33.68]	1.640 [41.66]
31	1	2.046 [51.97]	1.730 [43.94]	1.626 [41.30]	1.940 [49.28]
37	1	2.346 [59.59]	2.030 [51.56]	1.926 [48.92]	2.240 [56.90]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

*This page intentionally left blank.*

## ORDERING GUIDE

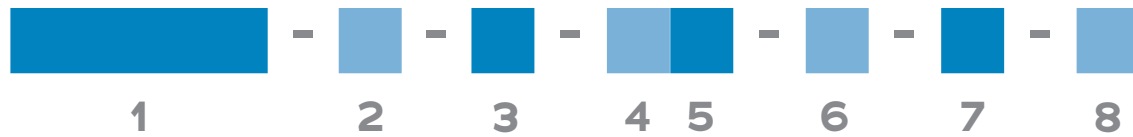

<b>1 Series</b>	MMSS Metal Micro-D Single Row Socket				
<b>2 Number of Contacts</b>	O4	O9	15	21	25 31 37
<b>3 Termination Type</b>	DD Straight Thru-Hole				
<b>4 Wire AWG</b>	4 24 AWG		6 26 AWG (STD)		8 28 AWG ○ 30 AWG
<b>5 Wire Type</b>	Q Nema HP3 (STD)		R M22759/11		S M22759/33 X Other
<b>6 Wire Length</b>	18.0 18.00 (STD)			XX.X Custom length	
<b>7 Color Scheme</b>	1 10 Repeating		2 Blue	3 White	4 Non Repeating 5 Yellow
<b>8 Shell Material &amp; Finish</b>	N Aluminum Shell, Electroless Nickel Plated			CD Aluminium Shell, Cadmium Plated	
	B Aluminium Shell, Black Anodized			P Stainless Steel Shell, Passivated	
<b>9 Hardware</b>	EJS End Jack Screw (MMSP only)			ETH End Threaded Hole (MMSS only)	
<b>10 Common Options</b>	HT High Temp Epoxy			RH RoHS Compliant	
<b>11 Shield / Jacket</b>	D Slip On Metal Braid		E Machine Braid	F Flexo Braid	
	J Nomex Braid		ST Shrink Tube		
<b>12 Mod Codes</b>	M10 Keyed			M30 Ground Spring	
	M50 Space Grade Micro-D, SPT1			M53 Space Grade Micro-D, SPT2	
<b>13 Special Instructions</b>	YYY Describe anything that is not covered in standard options				