
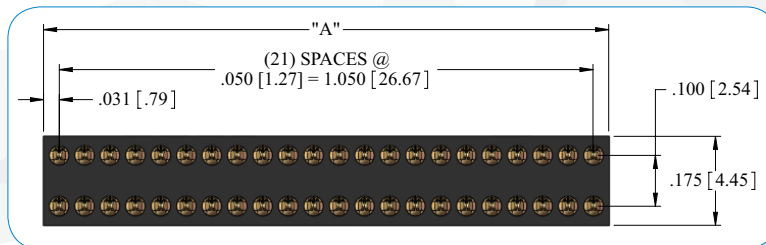
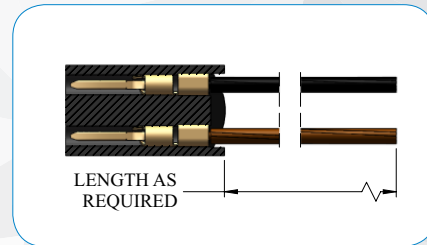
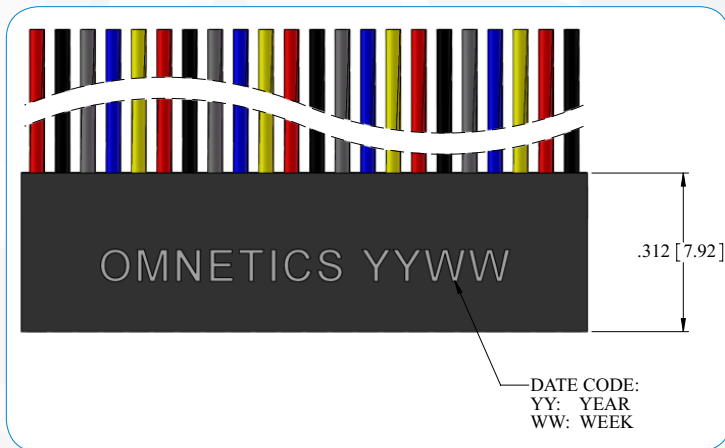


Dual Row Micro Strip

DRP-WD/WC LAYOUT

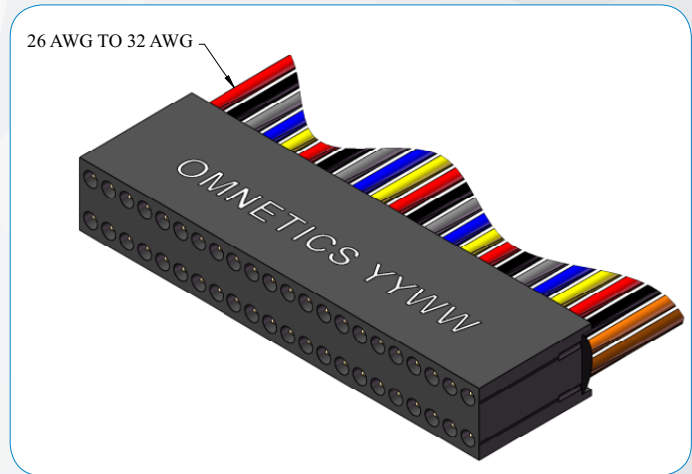



DIMENSIONS FOR "A"

To determine connector length "A":	
Add the total number of contacts in one row	_____
Add 1 contact cavity for each latch in the same row	_____
Add 1 contact cavity for each guide post in the same row	_____
Total contact cavities in a single row	_____
Subtract 1 from the total to get the number of cavity spaces and multiply by .050"	_____
Add .150" for each mounting hole	_____
Add .100" for each screw receptacle	_____
Add fixed end length constant	.062"
Total Length (Dimension A):	_____




Notes: Maximum length 1.85" (46.99). Maximum number of contact cavities is 64. Number of contacts must be reduced to accommodate hardware and mounting holes. Default locations for guide posts and latches may be changed by customer. Dimensions in [] are in Millimeters unless otherwise noted and are for reference only.

Dual Row Micro Strip

DRS-WD/WC LAYOUT

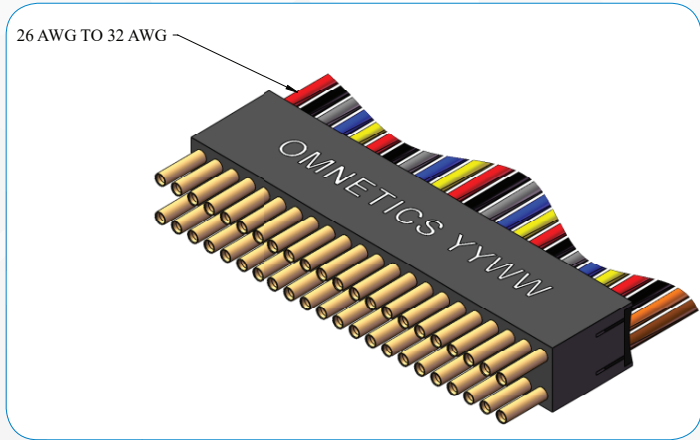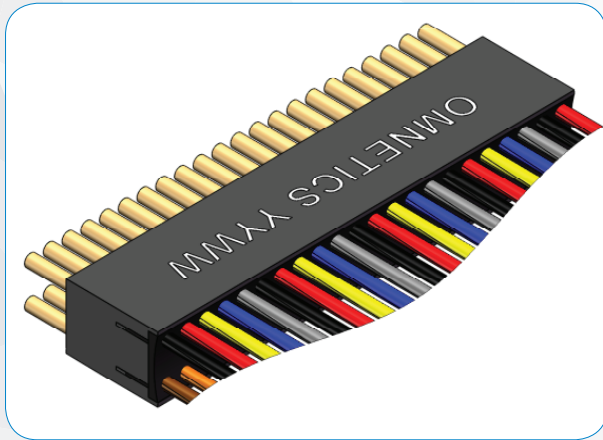

58

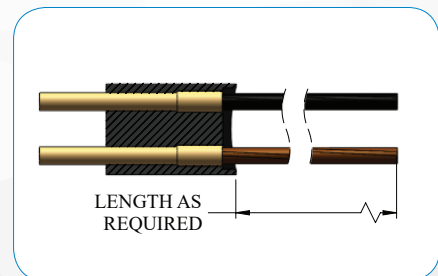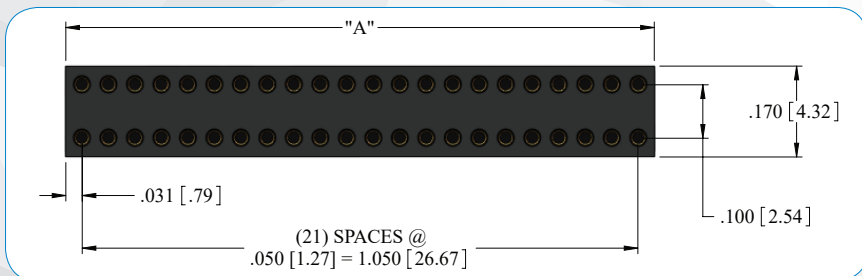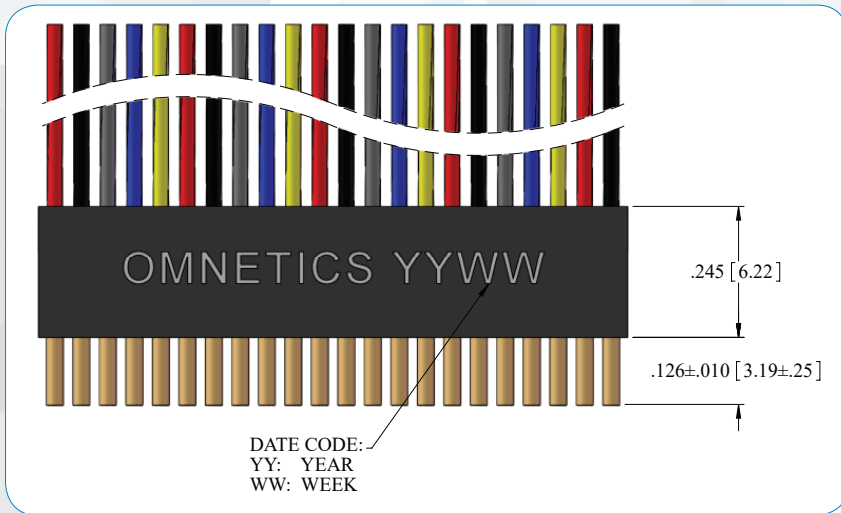

DIMENSIONS FOR "A"

To determine connector length "A":	
Add the total number of contacts in one row	_____
Add 1 contact cavity for each latch in the same row	_____
Add 1 contact cavity for each guide post hole in the same row	_____
Total contact cavities in a single row	_____
Subtract 1 from the total to get the number of cavity spaces and multiply by .050"	_____
Add .150" for each mounting hole	_____
Add .100" for each screw receptacle	_____
Add fixed end length constant	.062"
Total Length (Dimension A)	_____

Notes: Maximum length 1.85" (46.99). Maximum number of contact cavities is 64. Number of contacts must be reduced to accommodate hardware and mounting holes. Default locations for guide post holes and latches may be changed by customer. Dimensions in [] are in Millimeters unless otherwise noted and are for reference only.