









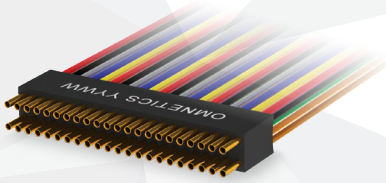





Dual Row Micro Strip

PRE-WIRED/CABLE (TYPE WD/WC) ORDERING GUIDE

SERIES	# OF CONTACTS	TERMINATION TYPE	WIRE LENGTH	COLOR CODED	COMMON OPTIONS
DRP PIN CONNECTOR 	02 - 64	WD DISCRETE WIRES	18.00 =18.00" STANDARD	C 10 REPEATING COLORS PER MIL-STD 681  Y ALL OTHER WIRE COLORS	G GUIDE POST/HOLE GS MULTIPLE GUIDE POSTS/HOLES 
		TW TWISTED WIRES	XX.XX CUSTOM LENGTH i.e. 23.40 =23.40"		LE LATCH (END MOUNT) LES MULTIPLE LATCHES (END MOUNT) 
DRS SOCKET CONNECTOR 		WC CABLE	26 AWG Standard/MAX  		LT LATCH (TOP MOUNT) LTS MULTIPLE LATCHES (TOP MOUNT) 
		WX MULTIPLE WIRE TYPES			M MOUNTING HOLE 
EXAMPLES:  DRP-44-WD-18.00-C  DRS-44-WD-18.00-C					CSR CENTER SCREW RECEPTACLE - PIN SIDE ESR END SCREW RECEPTACLE - PIN SIDE 
					CRS CENTER RETAINING SCREW - SOCKET SIDE ERS END RETAINING SCREW - SOCKET SIDE 
					CJP CENTER JACK POST - PIN SIDE EJP END JACK POST - PIN SIDE 
					HT HIGH TEMP RoHS RoHS COMPLIANT CS CUSTOMER SUPPLIED MATERIAL