
Dual Row Offset Micro Strip

PSM-WD/WC LAYOUT

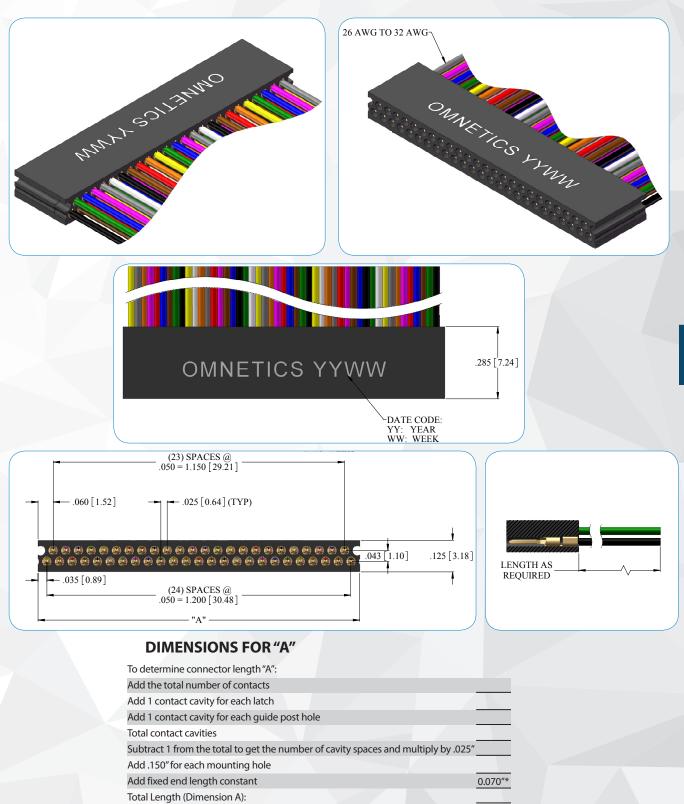


Notes: Maximum length 2.47" (62.74) without mounting holes. Maximum length 2.77" (70.36) with two end mounting holes. Maximum number of contact cavities is 97. Number of contacts must be reduced to accommodate hardware and mounting holes. * Add 0.095" when an even number of contact cavities is used and the connector has mounting holes. Default locations for guide post holes and latches may be changed by customer. Dimensions in [] are in Millimeters unless otherwise noted and are for reference only.

7260 Commerce Circle E • Minneapolis, MN 55432-3103 Phone: +1 763.572.0656 Fax: 763.572.3925 Email: sales@omnetics.com www.omnetics.com OMNETICS

Dual Row Offset Micro Strip

SSO-WD/WC LAYOUT

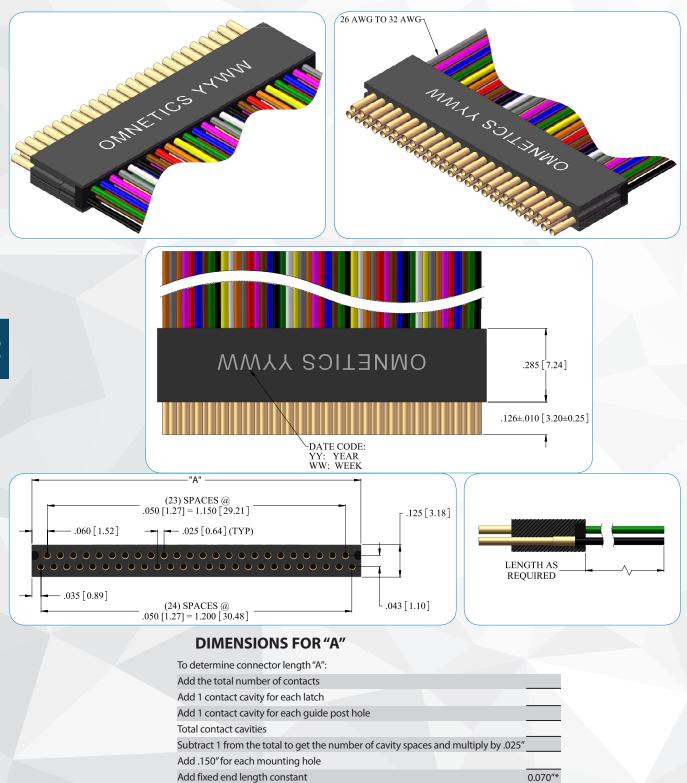

Total Length (Dimension A):

Notes: Maximum length 2.47" (62.74) without mounting holes. Maximum length 2.77" (70.36) with two end mounting holes. Maximum number of contact cavities is 97. Number of contacts must be reduced to accommodate hardware and mounting holes. * Add 0.095" when an even number of contact cavities is used and the connector has mounting holes. Default locations for guide post holes and latches may be changed by customer. Dimensions in [] are in Millimeters unless otherwise noted and are for reference only.

