
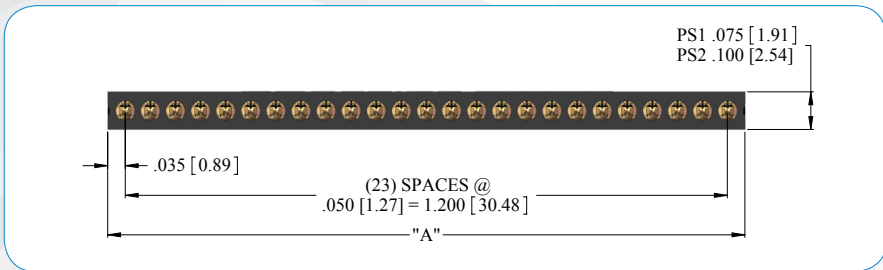
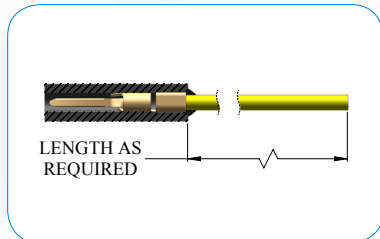
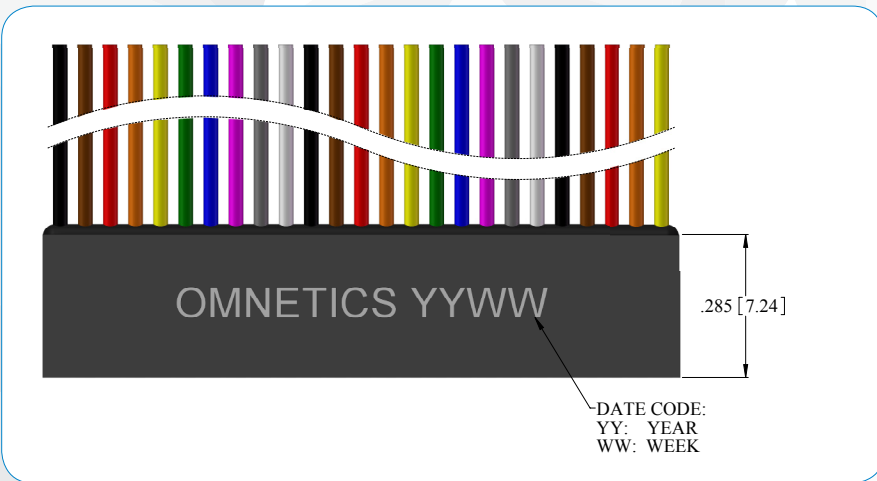


Single Row Micro Strip

PS1/PS2-WD/WC LAYOUT

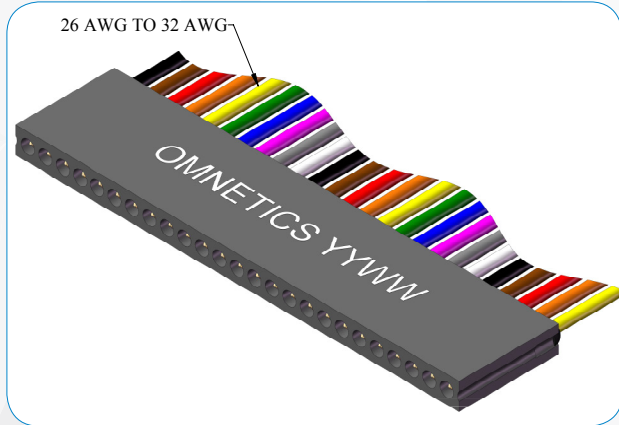

DIMENSIONS FOR "A"






To determine connector length "A":

Add the total number of contacts	_____
Add 1 contact cavity for each latch	_____
Add 1 contact cavity for each guide post hole	_____
Total contact cavities	_____
Subtract 1 from the total to get the number of cavity spaces and multiply by .050"	_____
Add .150" (3 contact cavities) for each mounting hole	_____
Add fixed end length constant	_____ .070"
Total Length (Dimension A)	_____

Notes: Maximum length for PS1 @ .075" thick 2.42" (61.47) Maximum number of contact cavities is 48. Maximum length for PS2 @ .100" thick 3.02" (76.71). Number of contacts must be reduced to accommodate hardware and mounting holes. Default locations for guide post holes and latches may be changed by customer. Dimensions in [] are in Millimeters unless otherwise noted and are for reference only.

Single Row Micro Strip

SSB-WD/WC LAYOUT

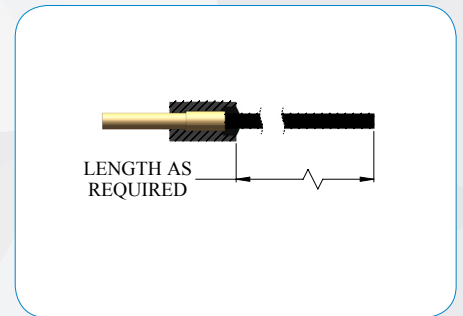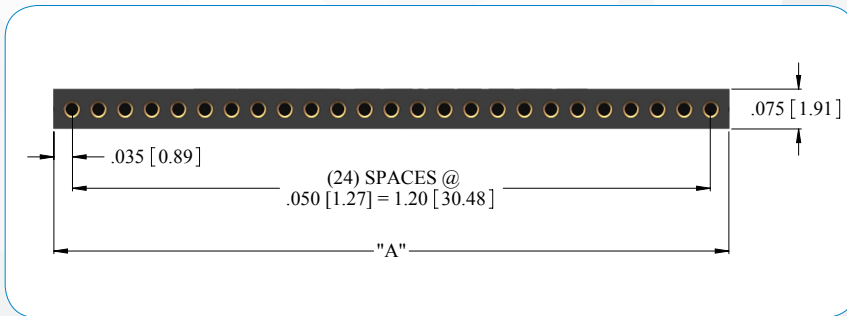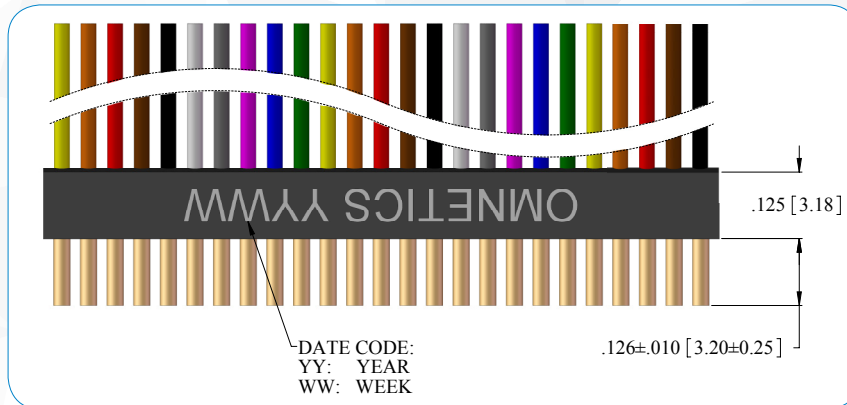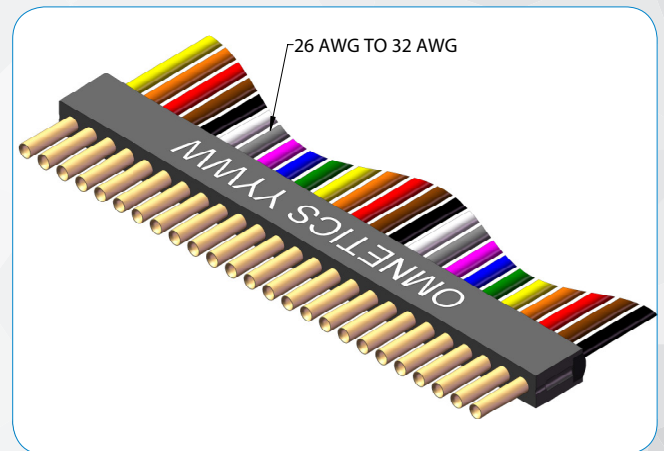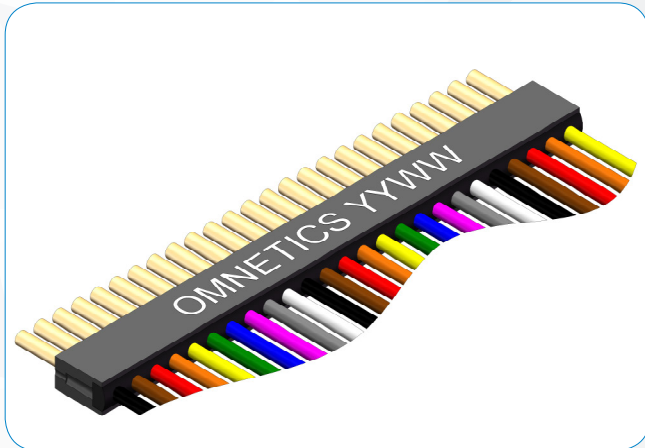

DIMENSIONS FOR "A"

To determine connector length "A":

Add the total number of contacts	_____
Add 1 contact cavity for each latch	_____
Add 1 contact cavity for each guide post	_____
Total contact cavities	_____
Subtract 1 from the total to get the number of cavity spaces and multiply by .050"	_____
Add .150" (3 contact cavities) for each mounting hole	_____
Add fixed end length	.070"
Total Length (Dimension A)	_____

Notes: Maximum length 2.42" (61.47). Maximum number of contact cavities is 48. Number of contacts must be reduced to accommodate hardware and mounting holes. Default locations for guide posts and latches may be changed by customer. Dimensions in [] are in Millimeters unless otherwise noted and are for reference only.